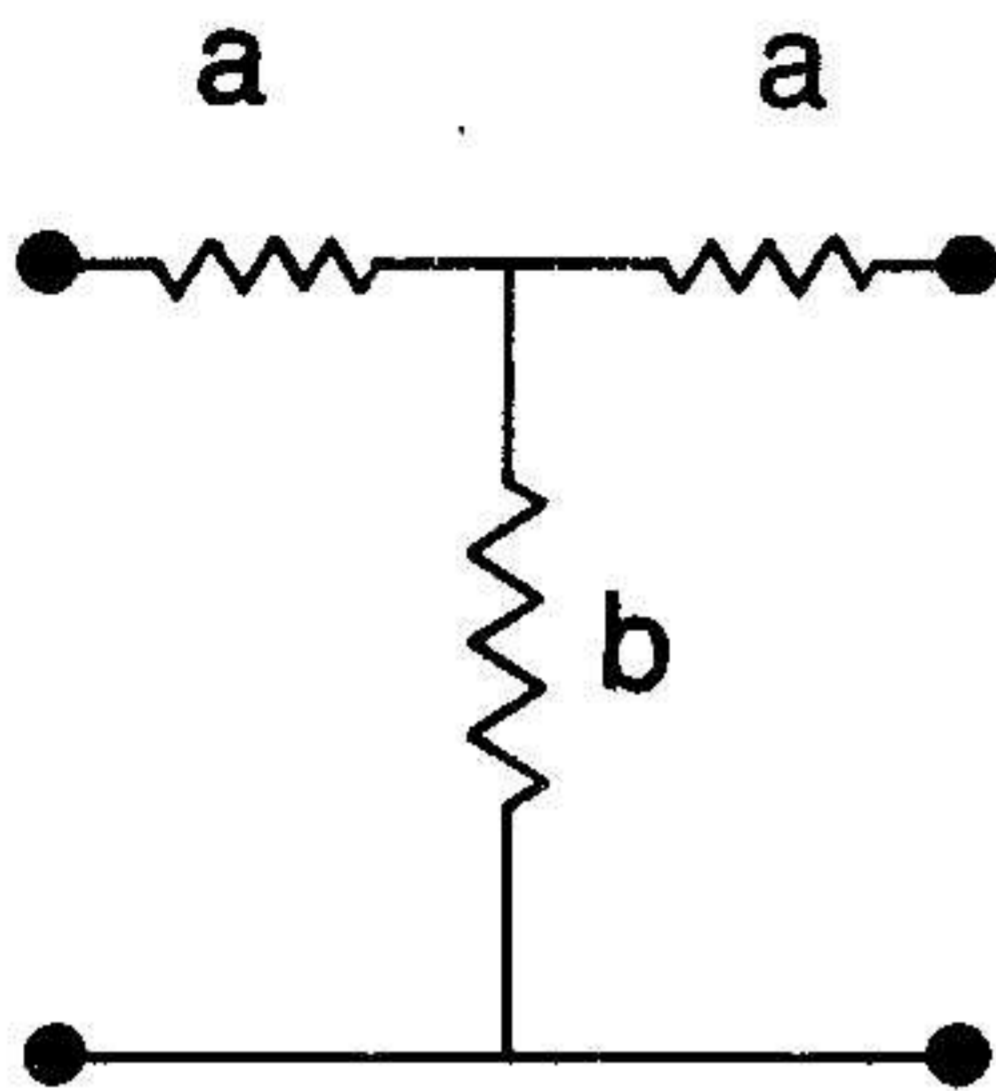
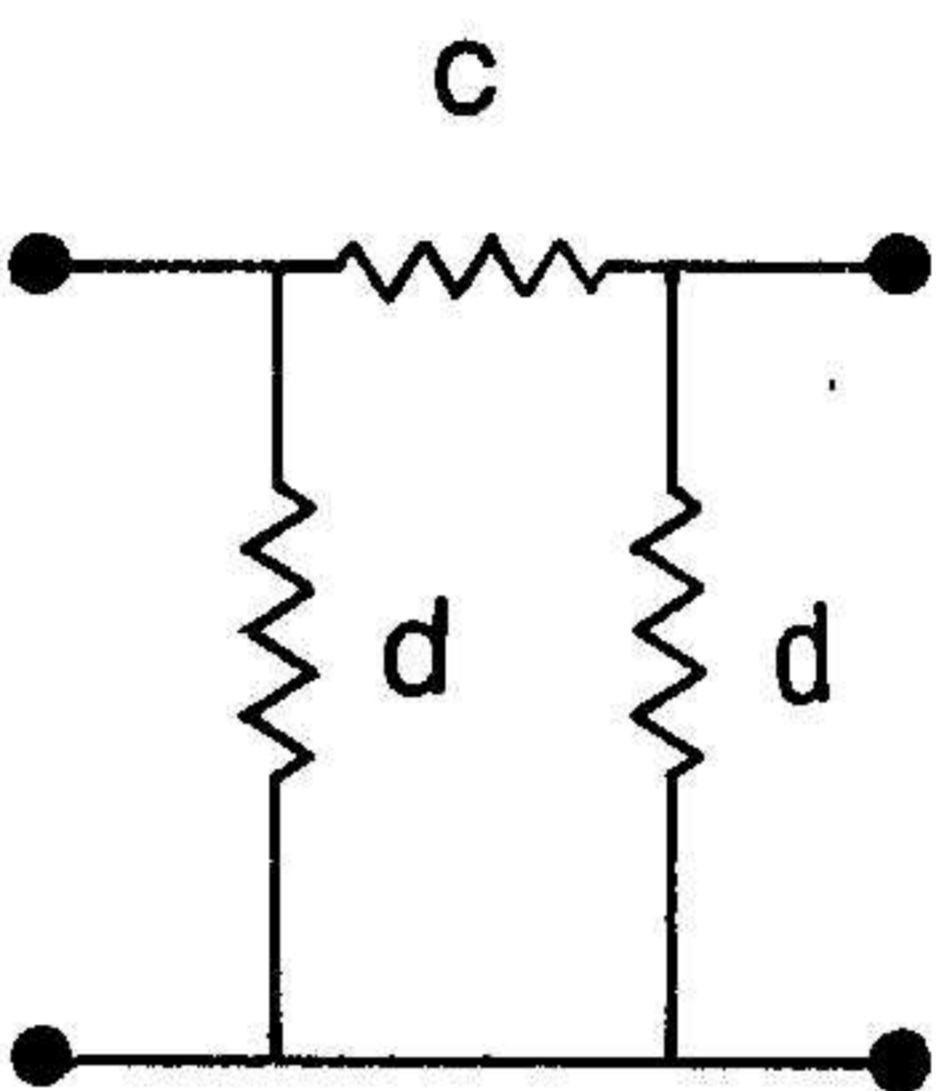
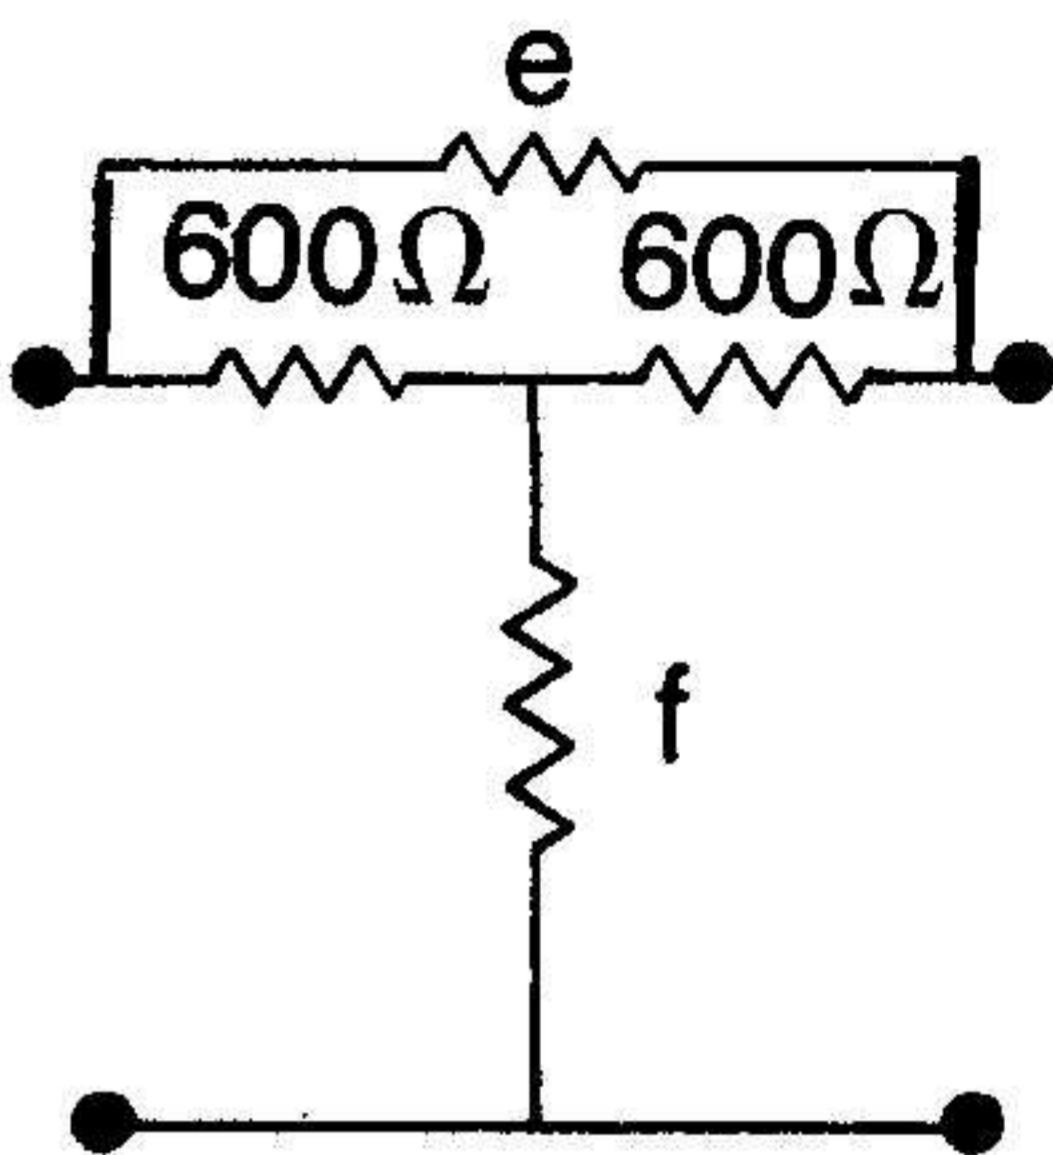


# 600 OHM input and output impedance attenuation pads (all resistance in OHMS)

	T pad		$\pi$ pad		Bridged-T pad	
Loss in dB						
	a	b	c	d	e	f
1	34.50	5201	69.2	10,436	73.2	4918
2	68.79	2583	139.4	5233	155	2317
3	102.5	1703	211.1	3512	247	1456
4	135.8	1258	286.2	2651	351	1025
5	168.0	987.1	365.0	2142	467	771
6	199.4	803.4	448.1	1806	597	603
7	229.4	670.0	537.3	1569	743	485
8	258.3	567.5	634.1	1394	907	397
9	285.7	487.1	738.9	1260	1091	330
10	311.7	421.9	853.1	1155	1297	278
11	336.3	367.2	980.3	1071	1530	235
12	359.1	321.7	1119	1003	1789	201
13	380.5	282.7	1273	946.1	2080	173
14	400.4	249.3	1444	899.1	2407	149
15	418.8	220.1	1633	859.5	2773	130
20	490.9	121.2	2970	733.3	5400	66.7
25	536.1	67.61	5324	671.4	10,070	35.8
30	563.2	37.99	9486	639.0	18,370	19.6
35	579.0	21.35	16,864	621.6	33,140	10.9
40	588.1	12.00	30,000	612.1	59,400	6.06
45	593.3	6.748	53,350	606.8	106,100	3.40
50	596.2	3.795	94,860	603.8	189,100	1.90